

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Video Projector
Manufacturer: ViewSonic
Firmware Version: N/A
Model(s): Pro8520HD

Version History:

Driver Version	Date	IP Link Compiler	GC Version	Notes
1	12/2/2013	1.6.0	3.5.1	Initial version.

Driver Notes:

Control Commands & States:

Aspect Ratio	Toggle		
Audio Mute	Toggle		
Auto Image	Execute		
Freeze	Toggle		
Input	Computer 1	Computer 2	Component
	Composite	S-Video	HDMI1
	HDMI2	USB A	USB B
	LAN	Toggle	
Lamp Mode	Normal	Eco	
Menu Navigation	Up	Down	Left
	Right	Enter	Menu
Power Control	On	Off	
Video Mute	Toggle		
Volume (Step)	Up	Down	

Status Available:

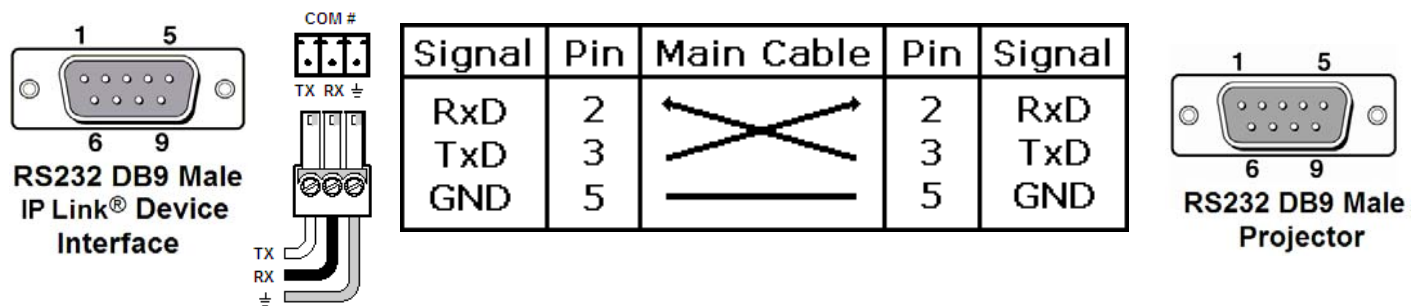
N/A

MLC60 Series Supported Commands:

Aspect Ratio	Toggle		
Audio Mute	Toggle		
Auto Image	Execute		
Freeze	Toggle		
Input	Computer 1	Computer 2	Component
	Composite	S-Video	HDMI1
	HDMI2	USB A	USB B
	LAN	Toggle	
Lamp Mode	Normal	Eco	
Menu Navigation	Up	Down	Left
	Right	Enter	Menu
Power Control	On	Off	
Video Mute	Toggle		
Volume (Step)	Up	Down	

Cable and Adapter Requirements:

F/F RS232 DB9 Null Modem Cable

Notes for the Device:**Serial communication:****Port Type:** RS-232**Baud Rate:** 19200**Data Bits:** 8**Parity:** None**Stop Bits:** 1**Flow Control:** None**Pin Assignments Diagram:**

Note: Captive screw connector may also be used as a serial connection.

General Notes: